


SIMPLEX® CEILINGS

255 Montpelier, St. Laurent
(Montreal) QC, Canada H4N 2G3
Tel: (800) 638-5726 Fax (514) 744-2716
www.simplexceilings.com

Specifications

Generation 2000 Planks

- Panels:** Provide Generation 2000 Planks system manufactured from {0.032" (0,81 mm), 0.040" (1,016 mm)} thick aluminum. Plank dimensions will be as shown on drawings. Planks to be [un-perforated, perforated using pattern #___ with a {standard, ___ in. un-perforated border}].
- Finish:** Select from standards. Custom colors available upon request.
- Suspension:** Suspension shall be extruded aluminum Z-bar, to be attached to (1 ½" "black iron"), (2" "black iron") channel with adjustable Locking Suspension Brackets
- Perimeter:** Provide G-2000 Mould with hold down clips as required in finish to match panels.
- Acoustical:** For perforated panels, provide 1 ½" (38mm) thick x ¾ lb./cu ft (12 kg/cu m) density glass wool fiber completely sealed in a black incombustible (Class A) bag. Alternatively, provide non-woven acoustical liner laminated to back of perforated panel.
- Accessibility:** System is upwards demountable, providing point accessibility.
- Standard Sizes:** 24" x 24" 24" x 48" 24" x 96" (Other custom sizes available upon request.)

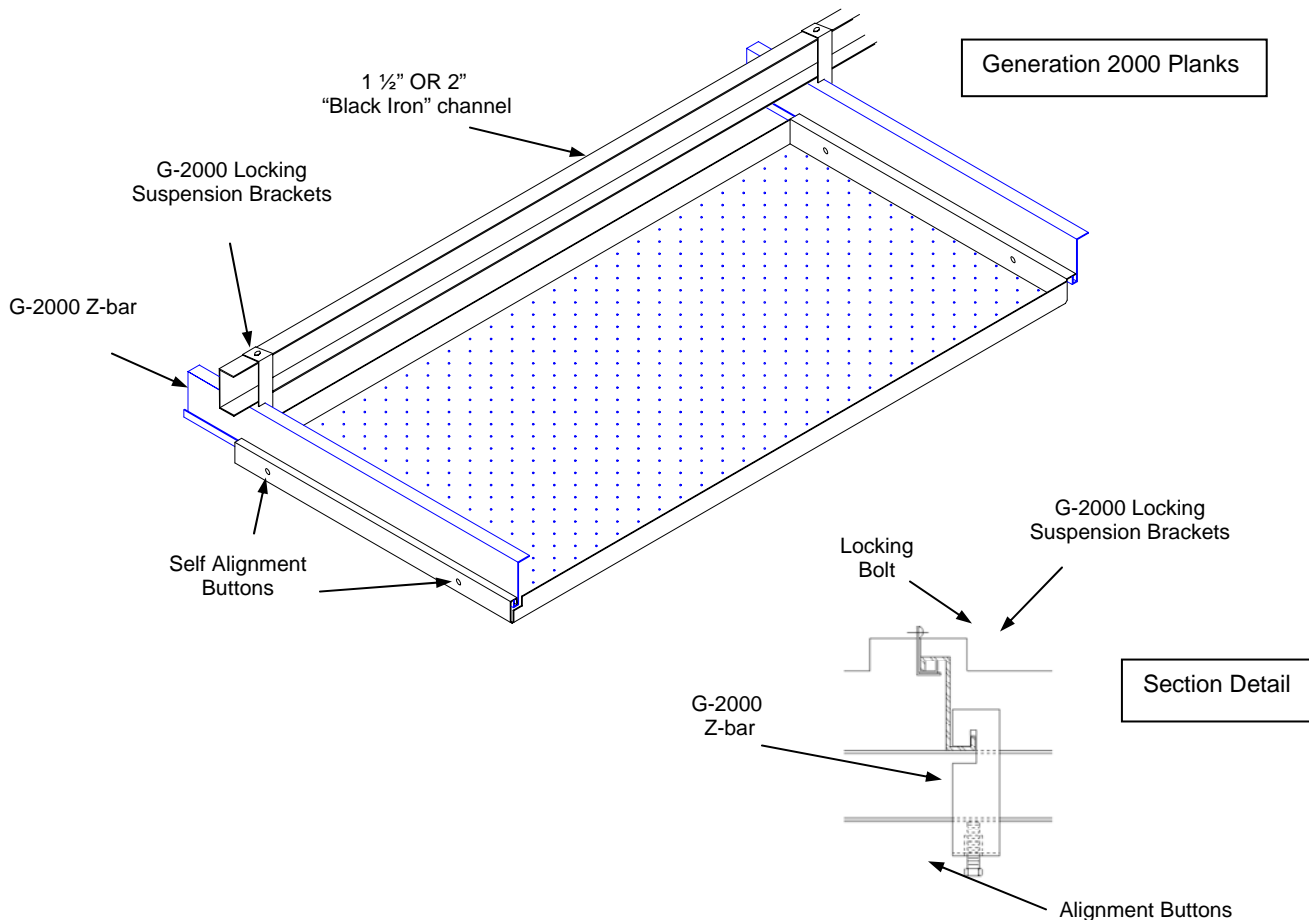

Specification subject to change without notice